


EFFECTIVE CONTROL
FOR INDUSTRIAL APPLICATIONS



**STEEL MILL
CABIN**

 **GL MAKINA**

TECHNICAL PROPERTIES

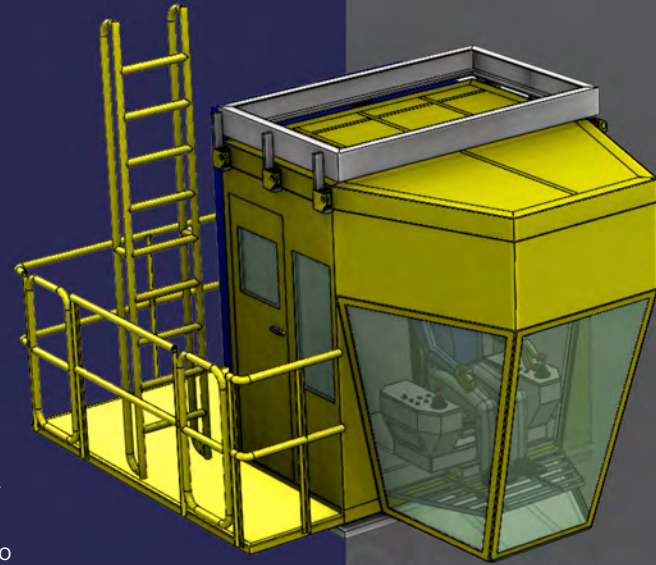

ENGINEERING

EXACTLY WHAT YOU NEED

We do not believe in a standard product line, because your application is particular to your industry. With nearly 10 years of design/build experience, we have the know-how to construct exactly what you need. We are able to make structural calculations and vibration analysis.

CUSTOMIZING


COMPLETE SOLUTION

GL products are designed and manufacturing by combining customer demands, field inspections and our experiences. If customer demand, we are able to perform all assembly, disassembly and start up. We can supply a complete solution in an integrated manner along with air conditioning systems and electrical devices.

QUALITY

QUALIFIED STAFF

All phases of the projects are controlled by qualified personnels which assures you about quality, consistency and customized features. From the preliminary stages of deciding what type of enclosures is needed to the delivery of the finished product, GL is there to guide you through the process.

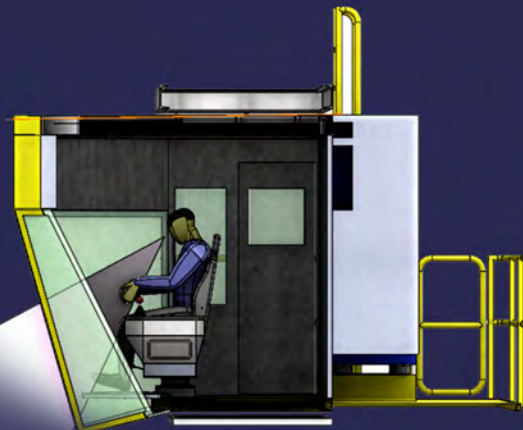

IMPROVE THE WORKING ENVIRONMENT

By adding some additional equipments, you can improve the working environment of crane operator.



BEST WAY TO MODERNIZATION

If you transmit to us electric schemes, we able to prepare control knobs and buttons as a turnkey product.


QUESTIONNAIRE

	SPECIFICATION	STANDARD OPTIONAL
GENERAL		
40 mm wall and 60 mm ceiling and floor insulation	Standard
Cable entrance at side wall, rear wall, roof or floor at your choice	Optional
Entrance door (rear or side)	Standard
Rubber pad on the floor (5 mm)	Standard
Platform (mountable or fixed)	Optional
Lower front window (openable or fixed)	Optional
Ladder at rear wall (mountable or fixed)	Optional
Cabin suspension	Optional
ELECTRICAL		
Terminal cabinet	Optional
Cabin light (inside the cabin)	Optional
Light switch and power socket outlet	Optional
Radio with CD – 12 V DC	Optional
Horn with foot switch	Optional
Wiper/washer (24V or 12V)	Optional
3 line plug	Optional
PAINTING		
Surface treatment by solvent	Standard-
Primer epoxy 120 micron, final 50 micron polyurethane	Standard-
Shotblasting to SA 2,5	Optional
Specified paint up to 300 micron	Optional
Inside color different from outside color	Optional
GLASS		
5 mm tempered safety glass	Standard
3+3 laminated safety glass	Optional
Double glazing tempered thermoglass (5/9/5)	Optional
Walkable safety floor glass (120 kg at 1 point)	Optional
ACCESSORIES		
Fire extinguisher 2 kg (powder or CO2 at your choice)	Optional
Waste container	Optional
Coat hooks and personal compartment	Optional
Instructor's tip-up seat	Optional
Mirror	Optional
Sunblinds at 3 upper wiindows	Optional
Screen holder	Optional
Sliding foot grids	Optional
Door lock with panic bar	Optional
AIRCO		
Industrial type monoblock air conditioner	Optional
Split type air conditioner	Optional
Foot heater (2kw)	Optional




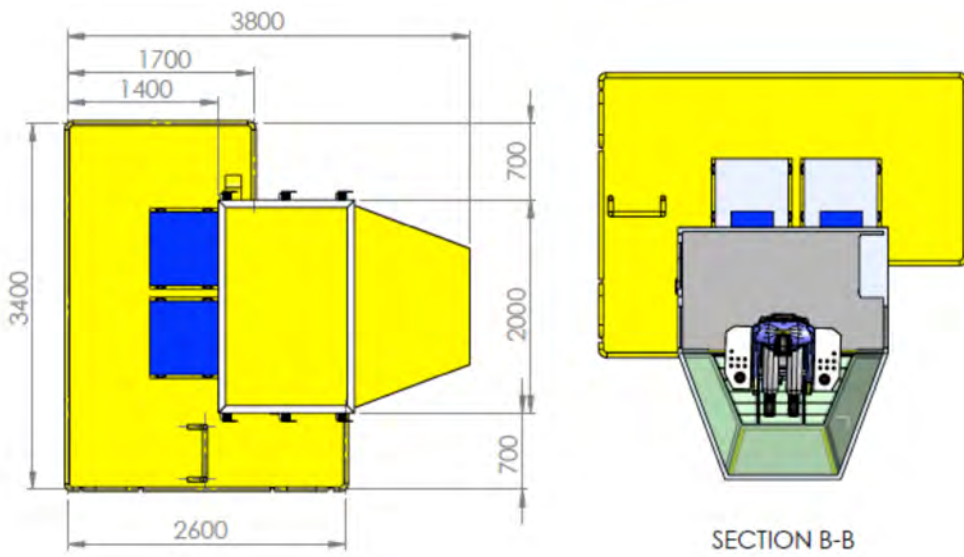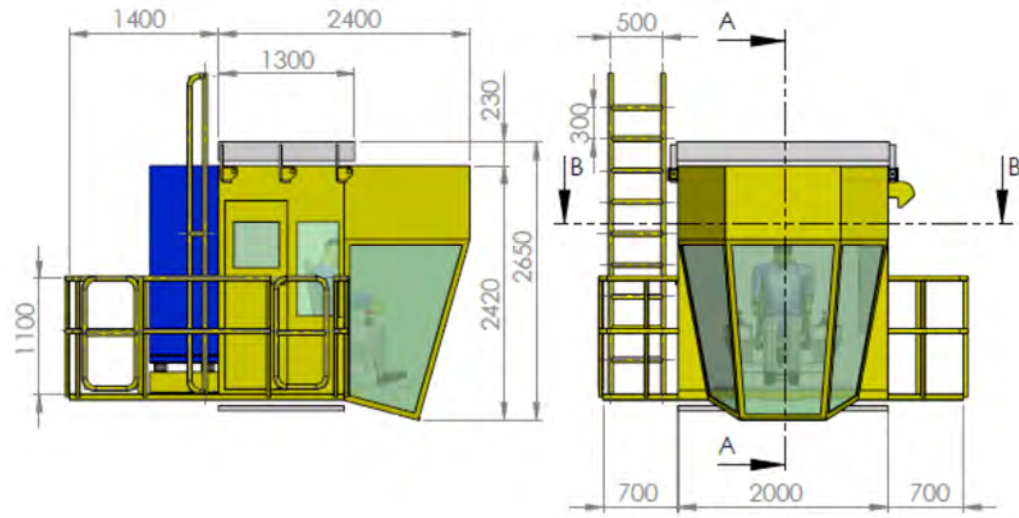

SECTION B-B

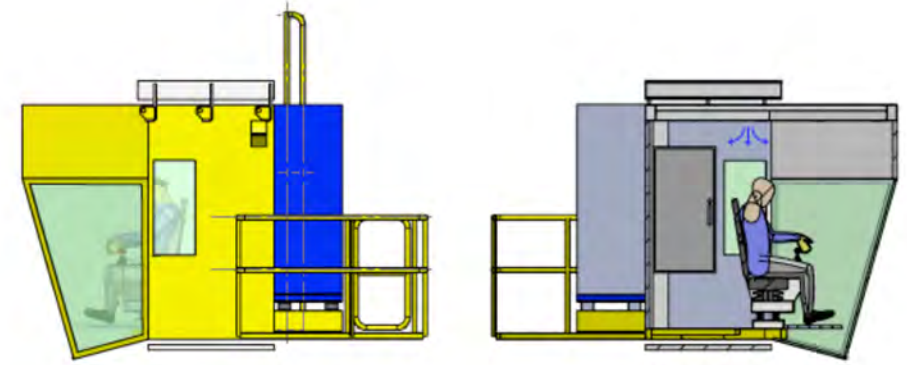

SECTION A-A

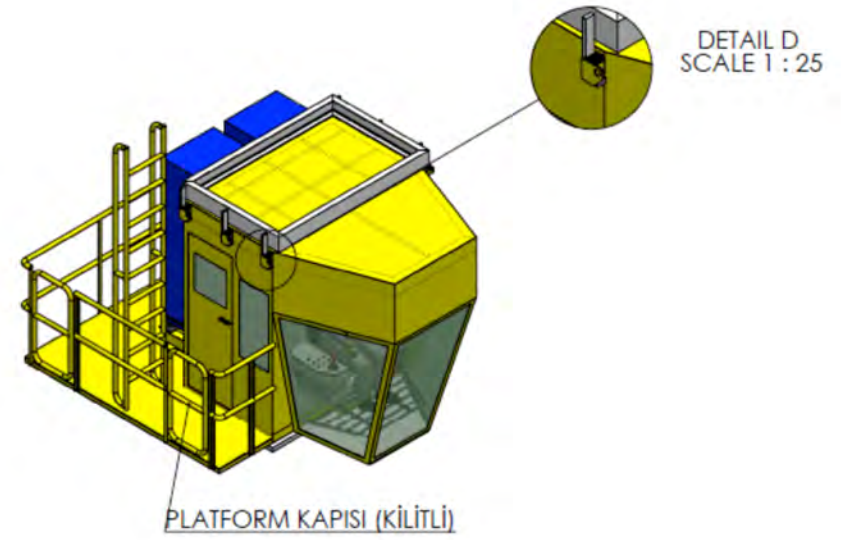

PLATFORM KAPISI (KİLİTLİ)





 GL MAKINA

GL Makina Ltd. Co.
T. +90 312 395 63 17
F. +90 312 395 64 17

www.glmakina.com
info@glmakina.com